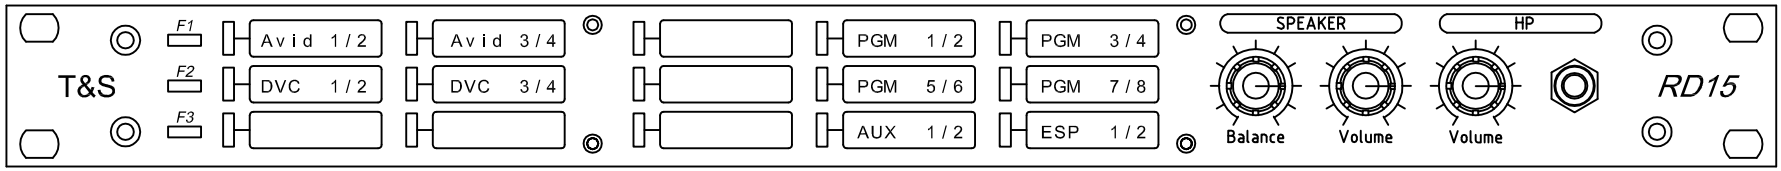

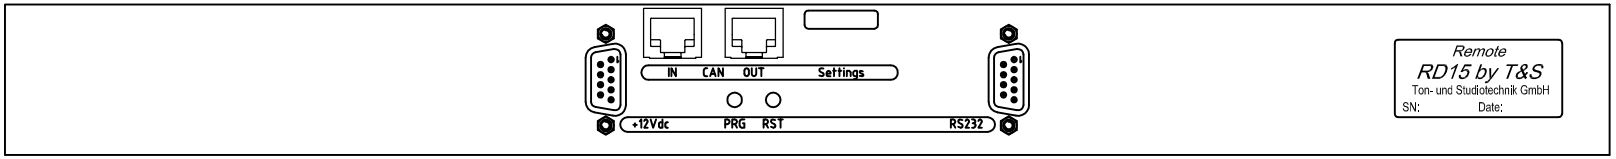

RS232 - 9pol. Sub-D female	
1	NC
2	TxD
3	RxD
4	NC
5	GND
6	NC
7	connected with Pin 8
8	connected with Pin 7
9	NC

POWER - 9pol. Sub-D female	
1	+12Vdc
2	CAN low
3	GND
4	AES3 PEAK (a) IN
5	GND
6	GND
7	CAN high
8	AES3 PEAK (b) IN
9	Reset IN

CAN IN - RJ45	
1	NC
2	NC
3	Reset IN
4	CAN high
5	Can low
6	GND
7	AES3 Peak (a) IN
8	AES3 Peak (b) IN

CAN OUT - RJ45	
1	NC
2	NC
3	Reset IN
4	CAN high
5	CAN low
6	GND
7	AES3 Peak (a) OUT
8	AES3 Peak (b) OUT

Settings - 8pol. DIP Switch	
1	CAN Terminator
2	AES3 Terminator
3	LOCAL HP CONTROL
4	SEND HP VOLUME
5	Dev-Adr A0
6	Dev-Adr A1
7	Dev-Adr A2
8	Mode

Mode: OFF = APU, ON = DAS3XX

Monitorerweiterung für DAS308sV2:
DIP: 1-1-1-0-0-0-1-1, DAS308sV2 Version V2.16i

Diese Zeichnung ist unser Eigentum. Jede Vervielfältigung, Verwertung oder Mitteilung an dritte Personen ist strafbar und wird gerichtlich verfolgt.

Nr.	Änderung	Datum	Name
01.03.2010			

Ton- und Studiotechnik GmbH

Datum	01.03.2010
Entw.	Enders
Bearb.	Enders
Gepr.	
Norm.	

Maßstab | Format A2

Audio Monitoring by T&S

Remote RD15
19" 1HE Einbaugehäuse
Ansicht

TUS/Remote RD15-19Zoll

Blatt 1
1 Bl.

Datei-Bezeichnung: Remote RD15-19Zoll.DWG